



SVF 30

| Ratio | 5 | 7 | 10 | 15 | 20 | 30 | 40 | 61 | 80 |
|--------------|------|------|------|------|------|------|------|------|------|
| Nm (1400rpm) | 45 | 45 | 46 | 44 | 39 | 48 | 42 | 38 | 32 |
| R.D. | 0.87 | 0.85 | 0.83 | 0.78 | 0.75 | 0.62 | 0.61 | 0.50 | 0.48 |


P

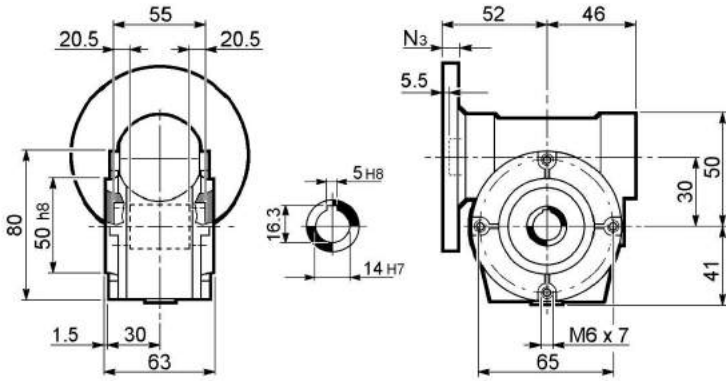


F

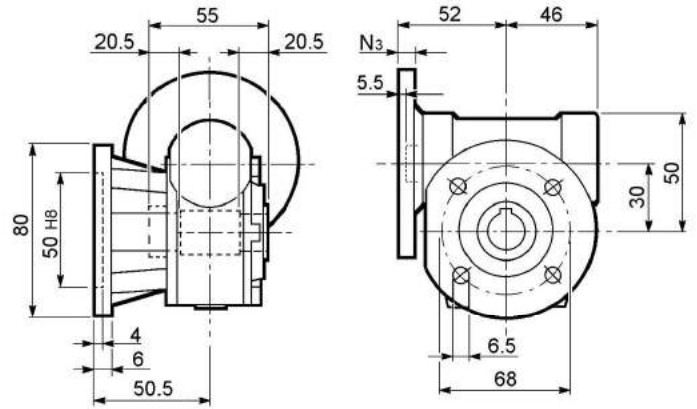


A

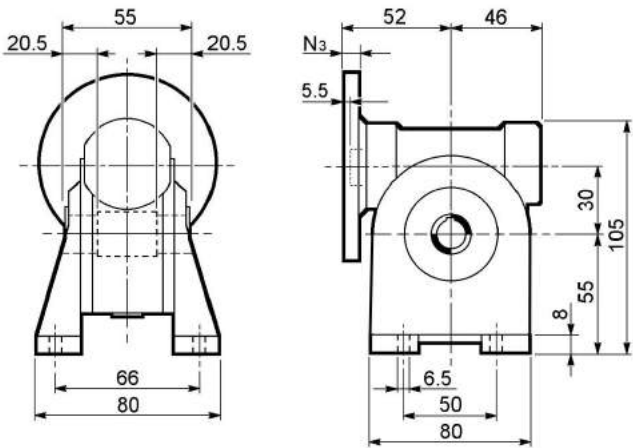


N

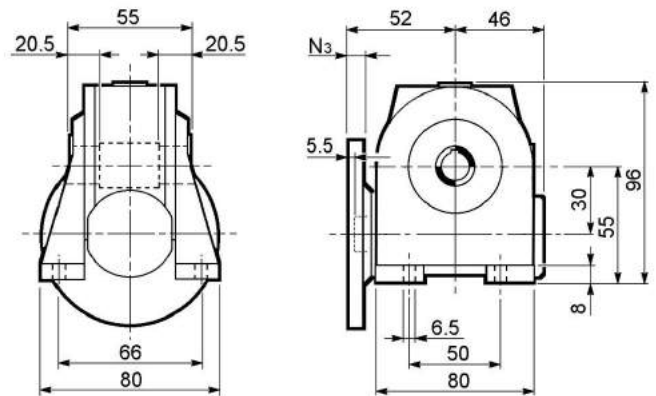

V

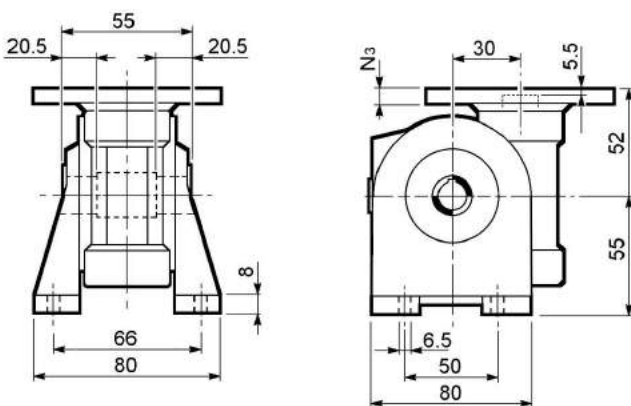

HS
Input shaft

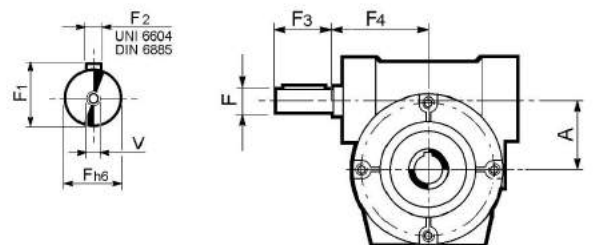



| A | F | F1 | F2 | F3 | F4 |
|----|---|------|----|----|----|
| 30 | 9 | 10.2 | 3 | 20 | 50 |

The weight: 1.1 kg


SVF 30

Output shaft

Single output shaft




Double output shaft

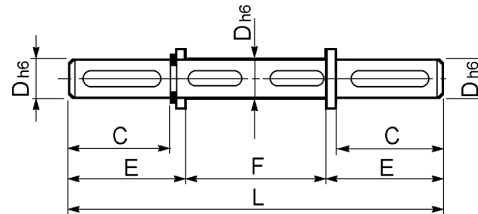


| Typ | D | C | E | F | F1 | F2 | L | M | N | V |
|--------|----|----|----|----|----|----|-----|----|----|-------|
| SVF 30 | 14 | 30 | 35 | 55 | 5 | 16 | 120 | 61 | 96 | M5x13 |

Torque arm

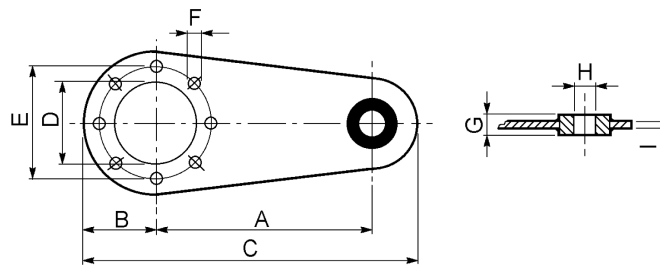

| Typ | A | B | C | D | E | F | G | H | I |
|--------|-----|----|-------|----|----|---|----|---|---|
| SVF 30 | 100 | 40 | 157.5 | 50 | 65 | 7 | 14 | 8 | 4 |

P.A.M.

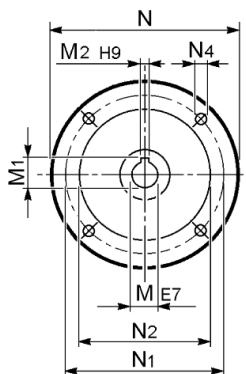

| P.A.M. | M | N | N1 | N2 | M2 | M1 | N4 |
|-----------|----|-----|-------|----|----|------|----|
| IEC 56B5 | 9 | 120 | 101,5 | 80 | 3 | 10,2 | 7 |
| IEC 56B14 | 9 | 80 | 65 | 50 | 3 | 10,2 | 7 |
| IEC 63B5 | 11 | 140 | 115 | 95 | 4 | 12,8 | 9 |
| IEC 63B14 | 11 | 90 | 75 | 60 | 4 | 12,8 | 7 |